



**OVER 130 YEARS LEADING THE INDUSTRY
IN WAREWASHING SOLUTIONS**



GLASSWASHERS and **DISHWASHERS**



(800) 263-5798 championindustries.com/1canada



HIGH VOLUME GLASSWASHERS

Quickly returning glassware back to service is the name of the game when it comes to high volume glass washing. With options up to 2,000 glasses per hour and a cool freshwater rinse, Moyer Diebel has the right design to keep your operation running at peak performance.

DF Revolution Rotary Glasswasher

1,200 glasses per hour

- **Integrated Tank & Wash Chamber** – Operator-centric design for easy access during daily use
- **Auto Fill, Clean, & Drain** – Requires no operator action
- **AI Water Quality Monitoring** – Refreshes wash water as needed during operation without interruption
- **Revolutionary EZ-Clip Wash & Rinse Arms** – Design for easy removal and cleaning
- **38% Less Water Consumption**
- **Compact 24” Wide Design**
- **Smart Controls** – On board machine diagnostics
- **2” LCD Screen** – For intuitive operation
- **Multi Speed System (low/med/high)** – Direct drive conveyor motor with anti-jam and adjustable speed control to produce premium results for all soil conditions
- **Touchless Conveyor Shut-Off** – Advanced sensor technology reduces risk of damage to delicate glassware
- **Self-Flushing Rinse Chamber** – Reduces cleaning requirements during operation due to channeling water to reduce soil build up
- **Solid State Sensors** – No mechanical switches and no adjustments required

NEW



*The clear choice for
sparkling glasses
every time!*

| MODEL | CAPACITY PER HOUR 2-1/2" GLASSES | CONVEYOR MOVEMENT | TEMP °F | | TANK HEAT (kW) | CLEARANCE THRU MACHINE | VOLTAGE |
|-------|--|----------------------|---------|-------|----------------------|------------------------------|--------------|
| | | | WASH | RINSE | | | |
| DF | 1,200 | clockwise | 140 | 75 | 3 | 12" | 208-220/60/1 |

INDUSTRY EXCLUSIVE DESIGN

SW Models Conveyor Glasswashers

2,000 glasses per hour

- **Cool water final rinse**
ensures steady supply of clean, cool glasses ready for immediate use, reducing labour and breakage
- **Automatic operation**
glass activated shut-off switch
- **Upper and lower wash and rinse arms**
- **Built-in three pump injection system**
- **Cabinet** – convenient storage for chemicals
- **Polypropylene belt conveyor**
eliminates chipping of stemware
- **Right-to-left or left-to-right operation**,
specify at time of order
- **Includes 6' NEMA 6-15p cord and plug**
- **One year parts and labour warranty**

SW400



SW600



Optional Splash Guard
SW12 (for SW400)
SW24 (for SW600)



Waste Collector
SW47

| MODEL | LENGTH (FT) | CAPACITY PER HOUR 2-1/2" GLASSES | CONVEYOR SPEED INCHES P/MINUTE | TEMP °F | | TANK HEAT (kW) | CLEARANCE THRU MACHINE | VOLTAGE |
|--------------|----------------|--|-----------------------------------|---------|-------|----------------------|---------------------------|--------------|
| | | | | WASH | RINSE | | | |
| SW400 | 4 | 2,000 | 14 | 140 | 75 | 3 | 10-1/4" | 208-220/60/1 |
| SW600 | 6 | 2,000 | 14 | 140 | 75 | 3 | 10-1/4" | 208-220/60/1 |

CRAFT SERIES GLASSWASHERS

The Moyer Diebel Craft Series is a perfect lineup of compact dishmachines solely focused on the bar experience. Engineered with **Quiet Run** technology, they bring you all of the latest technology and features at a highly competitive price.



601HRG

High Temperature / Heat Recovery / Built-in Booster

- **Heat recovery:** cold water feed only
- **Up to 50% more energy efficient**
- **RAPID-DRY**
- **Multi-cycle** - 3 cycle times
- **Electric tank heater** (2 kW)



601HTG

High Temperature / Built-in Booster

- **Heavy duty cycle** for heavily soiled wares
- **Dedicated rinse arms** for sparkling results
- **Built-in Booster with Rinse Sentry** 180°F final rinse
- **Multi-power**- allows for easy field conversion to three phase



601LTG

Low Temperature

- **Vari-cycle** for heavily soiled wares
- **Fill and drain**
- **Delime** feature
- **No PRV required**
- **Electric tank heater** (0.75 kW)



| MODEL | RACKS PER HOUR NSF RATED | PUMP MOTOR HP | FRESH WATER CONSUMPTION MAX USE (GAL PER RACK) | INCOMING WATER TEMP REQUIRED °F | TEMP °F | | TANK HEAT (kW) | CYCLE TIME (SECONDS) | CHEMICAL PUMPS SUPPLIED | VOLTAGES |
|--------|-----------------------------|------------------|--|--|---------|-------|-------------------|-------------------------|--|------------------------------|
| | | | | | WASH | RINSE | | | | |
| 601HRG | 25 | 1 | 15.6 | 55-80 cold water | 150 | 180 | 2 | 45/120/ 197 | • DETERGENT • RINSE AID | 208-240/60/1 208-240/60/3 |
| 601HTG | 25 | 1 | 39 | 140 with 6kW booster 110 with 9kW booster | 150 | 180 | 2 | 141 | • DETERGENT • RINSE AID | 208-240/60/1 208-240/60/3 |
| 601LTG | 25 | 1 | 38 | 120 | 140 | 140 | 0.75 | 141 | • DETERGENT • RINSE AID • SANITIZING | 115/60/1 |


UNDERCOUNTER DISHWASHERS

OPERATING PRINCIPLES

We don't just build machines; we build machines designed with each unique application in mind. While a machine can have a variety of use cases, we offer both Partial Drain/Overflow and Fill and Drain operating systems to cater to your specific needs.


PARTIAL DRAIN/OVERFLOW

The partial drain/overflow system is efficient and water-saving, making it perfect for cycles with low to medium soil levels. It refreshes the tank with fresh rinse water while simultaneously draining a portion of the soiled water.

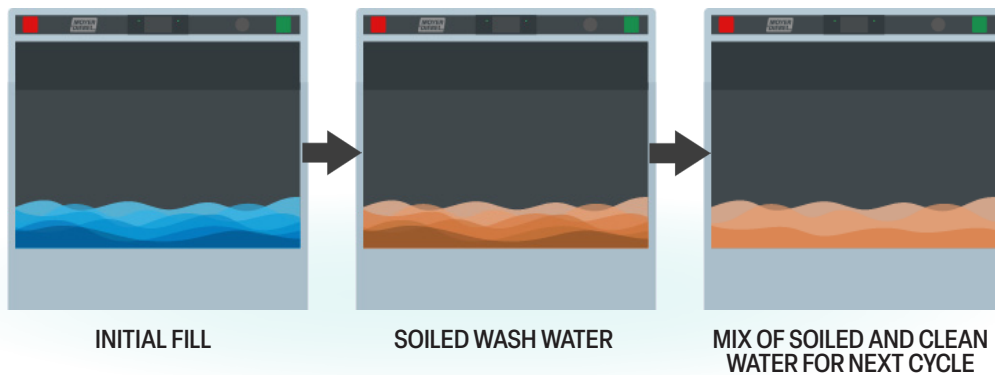

FILL AND DRAIN

The Fill and Drain principle, often referred to as freshwater wash, completely drains the water after the wash cycle and brings in fresh hot sanitizing water for the final rinse cycle which is used for the next wash cycle. This system is recommended for busy environment and wares with high soil levels.

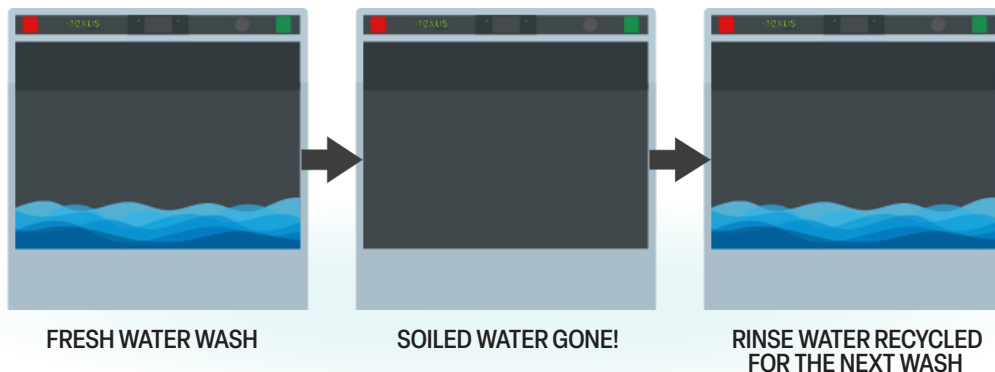

UNDERCOUNTER STANDARD FEATURES

- **CMD Quality - Made in Canada**
- **All stainless steel frame**
- **Auto clean** washes chamber at shutdown
- **Service diagnostics**
- **Automatic fill** at start-up
- **Pumped drain**
- **Precise digital temperature display and control**
- **StemSure™** protects wares from chipping and breaking
- **Powerful, whisper quiet, 1 HP pump**
- **Independent stainless steel** upper and lower arms
- **Liquid detergent & rinse-aid pumps**
- **1 year** parts and labour warranty

UNDERCOUNTER DISHWASHERS

When every square foot counts, Moyer Diebel undercounter dishwashers provide space-saving solutions for any commercial food service environment. With multiple models available, each catering to the right application, these quiet machines come in both high-temp and low-temp options.



NEXUS N900

High Temperature / Built-in Booster

- **Fill and Drain**
- **Exclusive 30 amp breaker**
- **NEW** LCD Control Display
- **Automatic fill at start up**
- **Robust, counter-balanced, double skin door**
- **Rinse Sentry** ensures proper 180°F/82°C final rinse temperature
- **Visual Diagnostics**
- **One 20" x 20" rack**



383HT

High Temperature / Built-in Booster

- **Partial Drain**
- **Smart Display** digital readouts/indicators
- **Auto Clean** washes chamber at shutdown
- **Fresh water rinse**
- **Fill Sentry** monitors incoming water
- **Drain Sentry** ensures proper draining
- **Rinse Sentry** ensures proper 180°F/82°C final rinse temperature
- **Robust, counter-balanced, double skin door**
- **Two 20" x 20" racks** one peg and one flat



| MODEL | RACKS PER HOUR NSF RATED | PUMP MOTOR HP | FRESH WATER CONSUMPTION MAX USE (GAL PER RACK) | INCOMING WATER TEMP REQUIRED °F | TEMP °F | | TANK HEAT (kW) | CYCLE TIME (SECONDS) | CHEMICAL PUMPS SUPPLIED | VOLTAGES |
|---------------|--------------------------------|---------------------|---|---------------------------------------|---------|-------|----------------------|-------------------------|-------------------------------|--------------|
| | | | | | WASH | RINSE | | | | |
| NEXUS N900 | 24 | 1 | 1.4 | 110-140 | 150 | 180 | 2 | 150 | • DETERGENT • RINSE AID | 208-240/60/1 |
| 383HT | 30 | 1 | 0.84 | 140 | 150 | 180 | 2 | 120 | • DETERGENT • RINSE AID | 208-240/60/1 |

COMPACT, EFFICIENT AND VERSATILE



501HT

High Temperature / Built-in Booster

- **Fill and Drain**
- **Advanced** digital temperature monitoring
- **Rinse Sentry** ensures proper 180°F/82°C final rinse
- **Fresh water wash and pumped rinse**
- **Multi-Power** allows for infield conversion to 208-240 volt and/or single to three phase
- **Scrub feature** extends wash cycle for heavily soiled wares
- **Delime feature**
- **Two 20" x 20" racks** one peg and one flat



501LT

Low Temperature

- **Fill and Drain**
- **Fresh water wash and pumped rinse**
- **Stainless steel top and side panels**
- **Counter-balanced door**
- **Energy Efficient** only 15 amp breaker required for 115v plug
- **Wash tank heater**
- **Two 20" x 20" racks** one peg and one flat



UH130B MAX

High Temperature / Built-in Booster

- **Fill and Drain**
- **NEW "Multi-level racking system"** increases wares capacity simultaneously washing dishes, cutlery and utensils
- **"Multi Power"** – this model is 208-240 volts and can convert from single to three phase in-field
- **Rinse Sentry** extends the cycle time to ensure 180°F+ (82°C) final rinse
- **Extended wash button** ensures stubborn residues are removed



| MODEL | RACKS PER HOUR NSF RATED | PUMP MOTOR HP | FRESH WATER CONSUMPTION MAX USE (GAL PER RACK) | INCOMING WATER TEMP REQUIRED °F | TEMP °F | | TANK HEAT (kW) | CYCLE TIME (SECONDS) | CHEMICAL PUMPS SUPPLIED | VOLTAGES |
|------------|--------------------------------|---------------------|---|---------------------------------------|---------|-------|----------------------|-------------------------|--|------------------------------|
| | | | | | WASH | RINSE | | | | |
| 501HT | 25 | 1 | 1.6 | 120 | 120 | 120 | 2 | 141 | • DETERGENT • RINSE AID | 208-240/60/1 208-240/60/3 |
| 501LT | 25 | 1 | 1.8 | 140 | 150 | 180 | 0.75 | 141 | • DETERGENT • RINSE AID • SANITIZING | 115/60/1 |
| UH130B MAX | 25 | 1 | 0.83 | 140 | 150 | 180 | 2 | 288 | • DETERGENT • RINSE AID | 208-240/60/1 208-240/60/3 |

UNDERCOUNTER DISHWASHERS

Opting for one of our ENERGY STAR® certified undercounter dishwashers will save you time and money. Enhance both financial and environmental stewardship by lowering operating costs as well as aligning with sustainable business practices.



UH330B HEAT RECOVERY

High Temperature / Built-in Booster

- **Partial Drain**
- **Heat Recovery** is 50% more energy efficient, has quicker drying of wares, and removes condensation to reduce operating costs
- **“Vari-cycle”** has 3 cycle time options for enhanced cleaning
- **Rinse Sentry** ensures proper 180°F/82°C final rinse temperature
- **Automatic drain cycle**
- Independent **scrub feature**
- **Stainless steel top and side panels**
- **Two 20” x 20” racks** one peg and one flat



UH330ADA

High Temperature / Built-in Booster

- **Partial Drain**
- **Heat Recovery** is 50% more energy efficient, has quicker drying of wares, and removes condensation to reduce operating costs
- **“Vari-cycle”** has 3 cycle time options for enhanced cleaning
- **Rinse Sentry** ensures proper 180°F/82°C final rinse temperature
- **Dry Assist**
- **Stainless steel top and side panels**
- **Two 20” x 20” racks** one peg and one flat
- 29-1/2” height fits easily under the thickest countertops allowing for 34” ADA requirements



| MODEL | RACKS PER HOUR NSF RATED | PUMP MOTOR HP | FRESH WATER CONSUMPTION MAX USE (GAL PER RACK) | INCOMING WATER TEMP REQUIRED °F | TEMP °F | | TANK HEAT (kW) | CYCLE TIME (SECONDS) | CHEMICAL PUMPS SUPPLIED | VOLTAGES |
|----------|--------------------------|---------------|--|---------------------------------|---------|-------|----------------|----------------------|----------------------------|------------------------------|
| | | | | | WASH | RINSE | | | | |
| UH330B | 24/18/13 | 1 | 0.76/0.63 | 140 | 150 | 180 | 2 | 150/200/277 | • DETERGENT • RINSE AID | 208-240/60/1 208-240/60/3 |
| UH330ADA | 30/18/13 | 1 | 0.65 | | 150 | 180 | 2 | 120/200/277 | • DETERGENT • RINSE AID | 208-240/60/1 208-240/60/3 |

DOOR-TYPE DISHWASHERS

Moyer Diebel single tank upright door-type machines strike the right balance between solidly built and budget friendly design.



NEXUS DHT

High Temperature / Built-in Booster

- Detergent chemical connection
- Vent fan control
- Automatic drain valve
- **Field convertible** corner or straight through operation
- **Automatic tank fill**
- **Interchangeable** upper and lower arm
- Top mounted splash proof controls
- **Rinse Sentry** ensures proper 180°F/82°C final rinse temperature
- **Auto start**



MD2000LT

Low Temperature

- **Built-in chemical pumps**
- **Fast cycle time**
- **115V**
- **Field convertible** corner or straight through operation
- **Integrated scrap tray** prevents food soil from entering drain system
- **Auto start/stop**
- **Airgap fill system**
- **17" tall door opening**



| MODEL | RACKS PER HOUR NSF RATED | PUMP MOTOR HP | FRESH WATER CONSUMPTION MAX USE (GAL PER RACK) | INCOMING WATER TEMP REQUIRED °F | TEMP °F | | TANK HEAT (kW) | CYCLE TIME (SECONDS) | VOLTAGES |
|--------------|--------------------------------|---------------------|---|---------------------------------------|---------|-------|----------------------|-------------------------|------------------------------|
| | | | | | WASH | RINSE | | | |
| NEXUS DHT | 55 | 1 | 0.9 | 110 | 150 | 180 | 5.2 | 60 | 208-240/60/1 208-240/60/3 |
| MD2000LT | 40 | 1 | 0.93 | 120 | 150 | 180 | | 90 | 115/60/1 |

DOOR-TYPE DISHWASHERS

Door-type dishwashers are designed for any size foodservice operation. These dependable machines preserve space, water, chemicals and energy.



DH6000

High Temperature / Built-in Booster

- **HMI** – Operator Touch Screen Interface
- **On-board service diagnostics**
- **Field convertible** corner or straight through operation (with splash shield)
- **Rinse Sentry** ensures proper 180°F/82°C final rinse temperature
- **Auto start** when hood is closed
- **17 3/16" [436mm]** standard clearance
- **Optional** pump drain + detergent pumps
- **Vent fan control**



DH6000T

High Temperature / Built-in Booster / Tall Hood

- **HMI** – Operator Touch Screen Interface
- **On-board service diagnostics**
- **Field convertible** corner or straight through operation (with splash shield)
- **Rinse Sentry** ensures proper 180°F/82°C final rinse temperature
- **Auto start** when hood is closed
- **27" [686mm]** extended clearance
- **Optional** pump drain + detergent pumps
- **Vent fan control**



| MODEL | RACKS PER HOUR NSF RATED | PUMP MOTOR HP | FRESH WATER CONSUMPTION MAX USE (GAL PER RACK) | TEMP °F | | TANK HEAT (kW) | CYCLE TIME (SECONDS) | CHEMICAL PUMPS SUPPLIED | VOLTAGES |
|---------|--------------------------------|---------------------|---|---------|-------|----------------------|-------------------------|-------------------------------|--|
| | | | | WASH | RINSE | | | | |
| DH6000 | 60 | 2 | 0.73 | 150 | 180 | 5.2 | 60 | • DETERGENT • RINSE AID | 208-240/60/1 208-240/60/3 480/60/3 |
| DH6000T | 60 | 2 | 0.73 | 150 | 180 | 5.2 | 60 | • DETERGENT • RINSE AID | 208-240/60/1 208-240/60/3 480/60/3 |

EFFICIENT, FAST, FLEXIBLE



DH6000VHR

High Temperature / Built-in Booster

- **Ventless Heat Recovery**
- **HMI** – Operator Touch Screen Interface
- **On-board service diagnostics**
- **Door Interlock** – locks door closed during the vent fan cycle
- **Field convertible** corner or straight through operation (with splash shield)
- **Rinse Sentry** ensures proper 180°F/82°C final rinse temperature
- **Auto start** when hood is closed
- **17 3/16" [436mm]** standard clearance
- **Optional** pump drain + detergent pumps



DH6000TVHR

High Temperature / Built-in Booster / Tall Hood

- **Ventless Heat Recovery**
- **HMI** – Operator Touch Screen Interface
- **On-board service diagnostics**
- **Door Interlock** – locks door closed during the vent fan cycle
- **Field convertible** corner or straight through operation (with splash shield)
- **Rinse Sentry** ensures proper 180°F/82°C final rinse temperature
- **Auto start** when hood is closed
- **27" [686mm]** extended clearance
- **Optional** pump drain + detergent pumps



| MODEL | RACKS PER HOUR NSF RATED | PUMP MOTOR HP | FRESH WATER CONSUMPTION MAX USE (GAL PER RACK) | TEMP °F | | TANK HEAT (kW) | CYCLE TIME (SECONDS) | CHEMICAL PUMPS SUPPLIED | VOLTAGES |
|------------|--------------------------------|---------------------|---|---------|-------|----------------------|-------------------------|-------------------------------|--|
| | | | | WASH | RINSE | | | | |
| DH6000VHR | 40 | 2 | 0.73 | 150 | 180 | 5.2 | 90 | • DETERGENT • RINSE AID | 208-240/60/1 208-240/60/3 480/60/3 |
| DH6000TVHR | 40 | 2 | 0.73 | 150 | 180 | 5.2 | 90 | • DETERGENT • RINSE AID | 208-240/60/1 208-240/60/3 480/60/3 |



Champion[®]

MOYER DIEBEL

WAREWASHING SOLUTION SPECIALISTS

At Champion Moyer Diebel Canada, we are proud to build on our combined legacy and expertise that spans over 200 years between these two renowned brands. We're dedicated to excellence in every aspect of the dishroom. Specializing in warewashing solutions, we design and manufacture a comprehensive range of products tailored to the needs of the foodservice industry. From Glasswashers and Undercounters to Door Machines, Rack Machines, and custom Flight type systems, our lineup is crafted with precision engineering and advanced technology.

Our commitment to quality, reliability, and expertise ensures that every product delivers outstanding performance, meeting the highest standards of cleanliness and efficiency. We take pride in providing exceptional customer service, supporting our clients every step of the way. Choose Champion Moyer Diebel Canada for dishwashing solutions that add value to your operations and elevate your dishroom experience.

(800) 263-5798 | championindustries.com/1canada | 2674 North Service Rd, Jordan Station ON L0R 1S0

In line with policy to continually innovate, develop, and improve its products,
Champion Moyer Diebel Canada reserves the right to change specifications and designs without notice.



PLC24-20240607