

Project _			
Item No			
Quantity.			

MD2000LT

Low Temperature
Door-type Dishwashing Machine



STANDARD FEATURES

- 20-1/2" tall door opening
- 40 racks / hour
- 4 Convertible Corner to straight and straight to corner
- Uses only 1.01 US gallons (.84 imp/3.8L) of water per cycle
- Quick 90 second cycle time
- Economical to operate
- All stainless steel construction
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps
- Top mounted controls include built-in chemical pumps and deliming system for dealing with scale
- Auto start/stop
- New integrated scrap tray prevents food soil from entering drain system
- Airgap fill system
- 115 volt unit 20 amp breaker required
- Made in America

c (UL) us	
-----------	--

SPECIFIER STATEMENT

Specified unit will be Champion DL2000 low temperature, chemical sanitizing commercial dishwashers meet ETL, UL, and CUL sanitation and construction standards WITHOUT the use of BOOSTER or TANK HEATERS. The model is constructed entirely of stainless steel. Each unit automatically washes, rinses and sanitizes utensils in standard 19-3/4" x 19-3/4" racks. Units come with standard upper and lower stainless steel wash arms.

OPTIONS & ACCESSORIE	
----------------------	--

- ☐ Sanitizer Alarm
- ☐ Vent Fan Control





MD2000LT

Low Temperature Door-type Dishwashing Machine

Shipping weight crated: 262 lbs.

Dimensions shown in inches

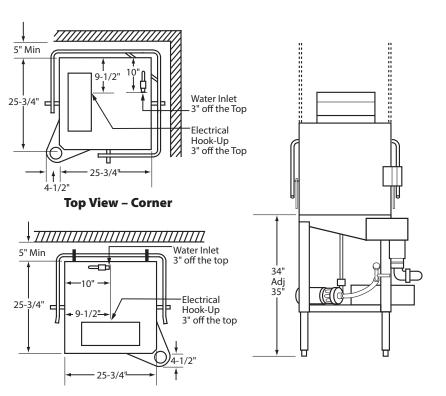

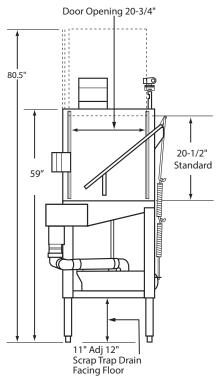

Top View - Straight

Front View

Right View




Table Construction

Utilities
Water 1/2" water inlet
Electrical 115V; 16 amps draw 20 amp breaker required
Drain 2" I.P.S.

Warning: Plumbing, electrical connections should be made by qualified personnel who will observe all the applicable plumbing, sanitary and safety codes and the National Electrical Code.

Moyer Diebel – USA 3765 Champion Blvd., NC 27105 336/661-1979 • Fax: 336/661-1979

Moyer Diebel – Canada 2674 N. Service Rd, Jordan Station, Ontario, Canada LOR 1SO 800/263-5798 • Fax: 905/562-5422

 $www. Moyer Diebel. com\ Champion Industries. com/canada ~ sales@moyer diebellimited. com$

SPECIFICATIONS

Capacities Racks per hr. (NSF rated)	40
Pump Capacity	52 Gal/197 LPM
Motor horsepower	1 HP
Water consumption	
Gal. per hr. (max. use)	40.4
[liters/imp gal.]	[152.9/33.6]
Gal. per rack	1.01
[liters/imp gal.]	[3.8/0.84]
Temperature °F/°C	
Required	120/49
Recommended	140/60
Time cycle in seconds	
Wash	45
Rinse	30
Dwell	15
Total cycle	90

